




FEED PUMP

- | | | |
|---------------|---|--|
| Fluid End | - | SLOW350-3808, Shanghai Lian Cheng Pump Manufacture Co Ltd |
| Flow Rating | - | 1590m ³ /Hr (7000 USgpm), Head : 25m @ 1480rpm |
| Suction Inlet | - | 16", #150 |
| Discharge | - | 12", #150 |
| PowerTrain | - | GM 8V-92TA 2-Stroke Diesel Engine, - Power Output bhp (kW) = 450 (336) @ 2100rpm - Peak Torque – lb ft (N.m) = 1250 (1695) @ 1300rpm |
| Skid Framing | - | 3800 x 1500 x 2400mm x 6MT |
| No of Units | - | 2 |

水泵检测数据表
(PUMP INSPECTION REPORT)

水泵编号Number:

| | | | | | |
|----------------|-----------------------------------|-----------------------------------|----------------------------|--------------------|-------------------------------------|
| 水泵型号type pump | SLOW350-380B | 流量 (m ³ /h) Capacity | 1590 | 功率 (kW) Power | 174 |
| 泵效率Pump Eff(%) | 75.0% | 扬程 (m) Head | 25 | 转速 (r/min) Speed | 1800 |
| 序号NO | 流量 Capacity (m ³ /h) | 扬程 (m) Head | 轴功率 Driver shaft power(kw) | 泵效 Pump Eff(%) | 换算至额定转速 transfer to rating speed |
| 1 | 0.0 | 29.91 | 100.48 | 0.0 | |
| 2 | 792.5 | 28.46 | 114.24 | 53.8 | |
| 3 | 1345.6 | 26.81 | 135.05 | 72.7 | |
| 4 | 1592.2 | 25.22 | 145.58 | 75.1 | |
| 5 | 1905.2 | 22.05 | 158.28 | 72.3 | |

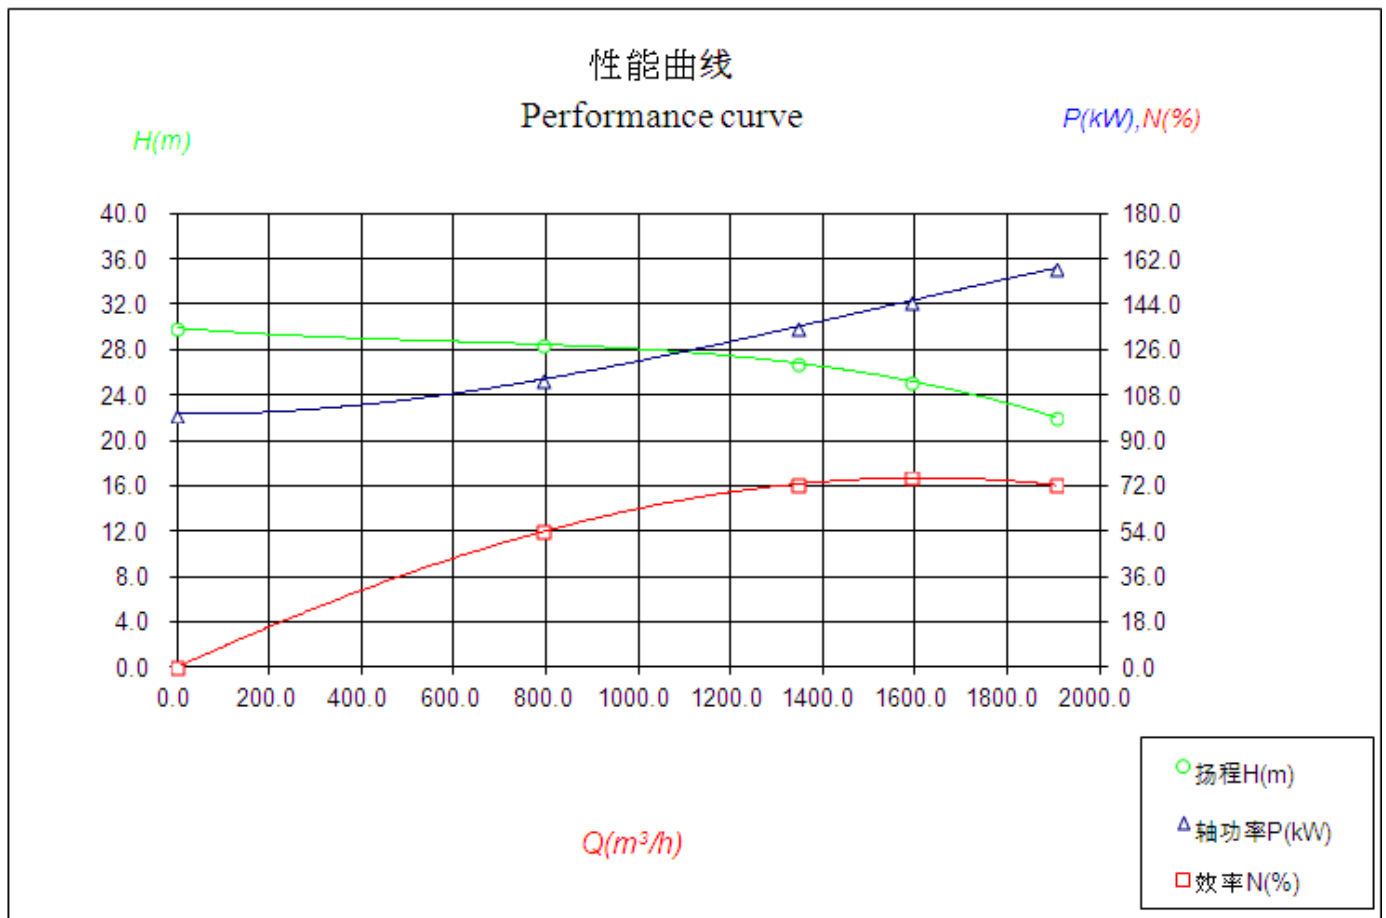

结论: 合格
Conclusion: conformity

测试: 胡学刚
testing: HXG

日期: 2010年1月
date: Jan / 10



8V-92TA
Industrial
Rated BHP
450 BHP @ 2100 RPM
1250 LB-FT @ 1300 RPM
Injector: 9G85
Turbocharger: TV8511 (1.39 A/R)

