




FEED PUMP

- | | | |
|---------------|---|--|
| Fluid End | - | SLOW350-3808, Shanghai Lian Cheng Pump Manufacture Co Ltd |
| Flow Rating | - | 1590m ³ /Hr (7000 USgpm), Head : 25m @ 1480rpm |
| Suction Inlet | - | 16", #150 |
| Discharge | - | 12", #150 |
| PowerTrain | - | GM 8V-92TA 2-Stroke Diesel Engine,
- Power Output bhp (kW) = 450 (336) @ 2100rpm
- Peak Torque – lb ft (N.m) = 1250 (1695) @ 1300rpm |
| Skid Framing | - | 3800 x 1500 x 2400mm x 6MT |
| No of Units | - | 2 |

水泵检测数据表
(PUMP INSPECTION REPORT)

水泵编号Number:

水泵型号type pump	SLOW350-380B	流量 (m ³ /h) Capacity	1590	功率 (kW) Power	174
泵效率 Pump Eff(%)	75.0%	扬程 (m) Head	25	转速 (r/min) Speed	1800
序号NO	流量 Capacity (m ³ /h)	扬程 (m) Head	轴功率 Driver shaft power(kw)	泵效 Pump Eff(%)	换算至额定转速 transfer to rating speed
1	0.0	29.91	100.48	0.0	
2	792.5	28.46	114.24	53.8	
3	1345.6	26.81	135.05	72.7	
4	1592.2	25.22	145.58	75.1	
5	1905.2	22.05	158.28	72.3	

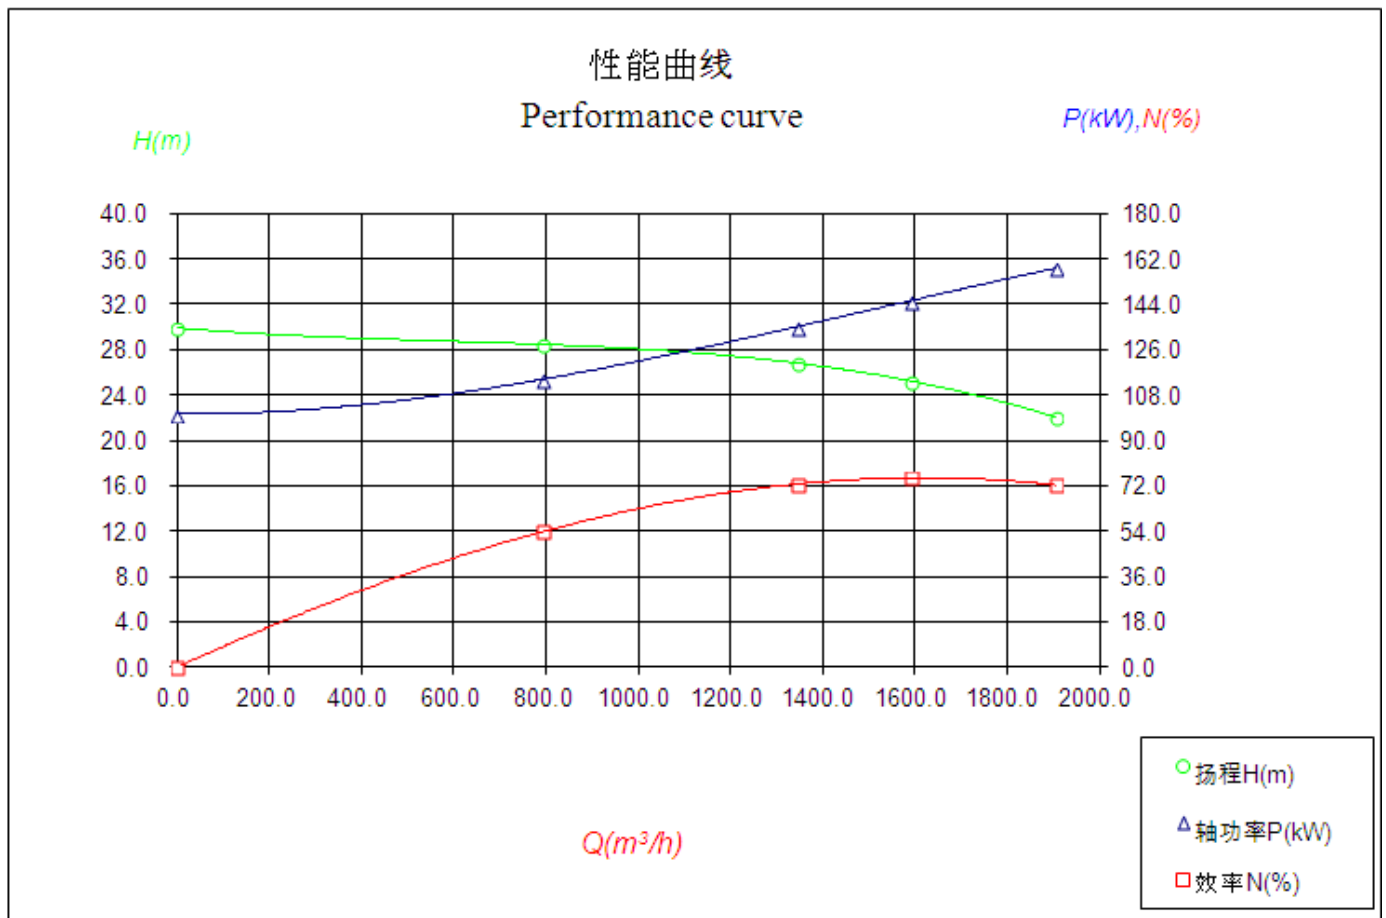

结论: 合格
Conclusion: conformity

测试: 胡学刚
testing: HXG

日期: 2010年1月
date: Jan / 10



8V-92TA
Industrial
Rated BHP
450 BHP @ 2100 RPM
1250 LB-FT @ 1300 RPM
Injector: 9G85
Turbocharger: TV8511 (1.39 A/R)

